

Our Accentra Insert was recognized for its innovative technology and design.



Value

The Accentra Insert delivers high overall efficiencies due to the unique heat exchanger. The heat exchanger is accordion shaped so the maximum amount of heat from the flue gases gets transferred out into the room. The Accentra Insert is rated at 42,000 BTUs/per hour and will typically heat 1450-sq. ft. of living space in the Northeast.

That's Real Value.

That's the Harman Difference!

Features:

- Automatic ignition
- Automatic temperature control
- Accordion heat exchanger provides greater heat exchange surface in less space
- Exhaust Sensing Probe control**
- Room sensor
- 57 lb. hopper capacity
- Power cord can be placed on either side of the stove
- Harman Insert Track System for easy installation and cleaning**
- New 176 sq. inches of cleaner glass
- Quiet operation
- Harman quality, fit and finish
- Harman Gold Warranty



Options:

- Ceramic log set
- 100% outside air**
- 3 in. vent pipe
- Zero clearance housing for use with wood mantle
- Harman Built Mantel**
- Insert Track installation supports
- Color options include: charcoal, forest green, mojave red, metallic blue, patriot blue, golden-fire brown, honeyglow brown, and black
- 20" and 22" reduced height backing for smaller fireplace openings available by special order

**Exclusive to Harman



HARMAN STOVE COMPANY

352 Mountain House Road • Halifax, PA 17032

Phone: (717) 362-9080 • Customer Service: (717) 362-1422

Fax: (717) 362-4251 • www.harmanstoves.com


E-mail: sales@harmanstoves.com

Specifications:

BTU Range:	0 to 42,000
Hopper Capacity:	57 lbs. for standard 24 in. fireplace opening 48 lbs. for special order 22 in. fireplace opening 38 lbs. for special order 20 in. fireplace opening
Fuel:	Wood Pellets
Blower Size:	180 cfm
Outside Air Size:	3 in.
Height:	32.06 in.
Width:	41.78 in.
Depth:	29.91 in.
Weight:	450 lbs., includes surround
Electrical:	Average 255 watts
Venting Size:	4 in. PL pellet vent pipe standard 3 in. PL pellet vent pipe option with fireplace housing*
Feed Rate:	.75 lb. per hour (minimum) 5 lbs. per hour (maximum)
Clearance to Combustibles:	
Side wing to trim:	0 in.
Front hearth protection:	6 in.
Top of insert to mantel trim or ledge:	12 in.
Zero clearance housing(optional):	3 in. from exhaust vent

*See manual for installation options

Clearances and Dimensions:

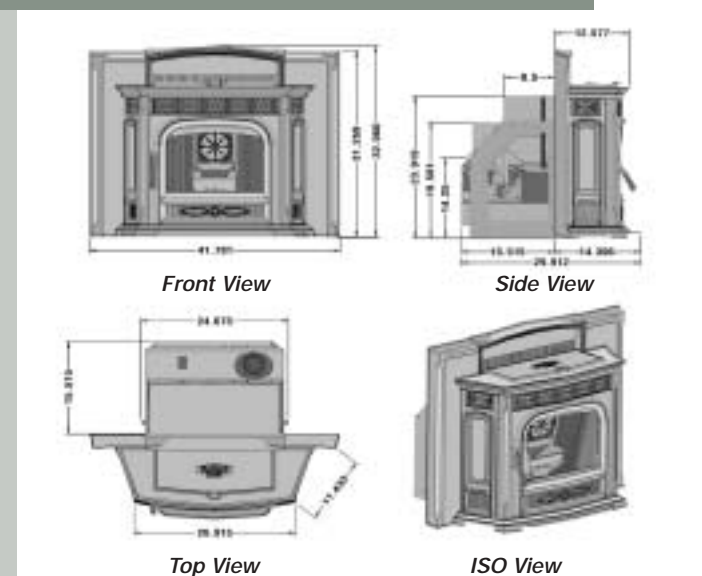

Safety Testing by OMNI-Test Laboratories, Inc.
ASTM-E1509, ULC-C1482, UL 127, EPA method 28A and 5G



Your Harman Dealer Is:



The Harman Accentra Pellet Fireplace Insert



Award-winning design and technology with the highest heat output of any pellet insert.

When you want heat, buy a Harman!



The large hopper opening makes it easy to fill with pellets. The hopper door is attractively accented with the Harman Iron logo.

Sealed hopper holds up to 57 pounds of pellets

State-of-the-art, whisper-quiet, variable-speed blower



Exclusive air wash system keeps door glass cleaner, longer

Large decorative glass door



The control panel is hidden behind the left side door.

Optional battery backup

Nautical Medallion adds style even without a fire




Door opens the front of the stove for fast and easy ash removal

Harman Accentra Insert

The Accentra Insert will give you more heat, better temperature control, and a level of convenience you won't find in other pellet inserts. The Accentra's many outstanding features make it the best value pellet insert on the market today. The Accentra's versatile design lets you convert a heat wasting fireplace into an efficient heating source. The Accentra Insert could also be used to create a fireplace that doesn't require a chimney for your home. A special zero clearance fireplace kit converts the Accentra Insert into a fireplace that can be placed in a corner or against any wall of your home. You can choose from a variety of mantels and facings that complement your home's decor. The Accentra's on-board microprocessor constantly senses room temperature and automatically makes adjustments in the feed rate and air supply so you get just the right amount of heat 24 hours a day. This remarkable technology lets you fill the hopper, set the desired temperature, and walk away. The Accentra Insert lights automatically, brings

the room up to the exact temperature, and will turn off if no heat is required. No other pellet insert offers such accurate and trouble free temperature control. The control technology gives you the widest heat output range of any insert on the market making it an ideal choice to take the chill off in the spring and fall and to heat your home during the coldest months of the winter. As with all Harman pellet stoves, maintenance is minimal and cleaning is easy. The Accentra Insert lets you burn close to a ton of pellets before ash removal is needed. And what is even better, the Harman Insert Track System lets you slide the insert out of the fireplace so that it can be cleaned or serviced without having to disconnect the venting system. This innovative design is only available on Harman pellet inserts and lets you reach key components for yearly cleaning. At Harman we strive to provide stoves that warm your home efficiently, are dependable, and easy to use. The Accentra Insert keeps with this tradition.

Temperature Control

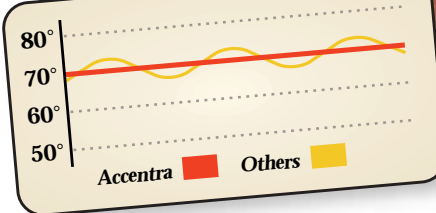

Consistent Temperature


The Accentra Insert does not use a thermostat as do other pellet stoves, but rather a tiny sensing probe that sends information to the microprocessor on the stove. This information is used to feed the proper amount of fuel at the right time to keep you warm and comfortable. The Accentra Insert also has a Stove Temp Mode that allows you to set the stove temperature as desired rather than the room temperature.

Harman Built Mantels

Harman Built mantels are designed to enhance the presence of the Accentra Pellet Fireplace Insert. All mantels are constructed by skilled craftsmen using only the finest materials. Each model can be ordered with four stain options: light, medium, dark, and cherry stains on birch or oak. Mantels can also be ordered unstained. The M1, M2, and M3 mantels are available in plain, scroll, or raised panel. All Harman mantels can be installed with or without a hearth base. Choose the tile or marble finish facing that complements your decor.


M1 Mantel

The M1 mantel is designed to be placed flush to a wall where there is space behind the wall for the firebox to be installed.

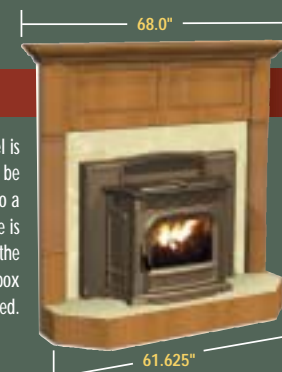

M2 Mantel

The M2 is designed to be installed along a wall. The M2 top enclosure is available in plain or raised panels and can be trimmed to fit your ceiling height.

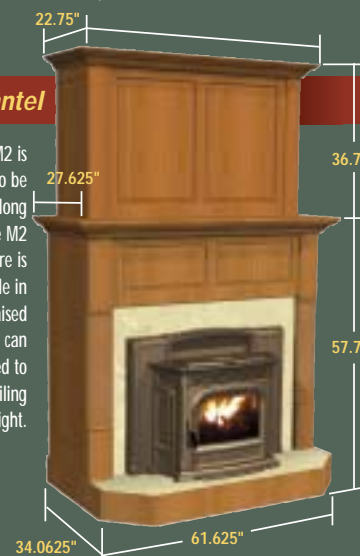

M3 Mantel

The M3 corner mantel can be used to install your fireplace in a corner. The M3 top enclosure (not shown) is available in plain or raised panels and can be trimmed to fit your ceiling height.



Contact your Harman dealer to see the actual colors and options available

