
PB 7/5/06 9:19 AM Page 1



The Harman PB105 Pellet Boiler



The Harman PB105 Pellet Boiler

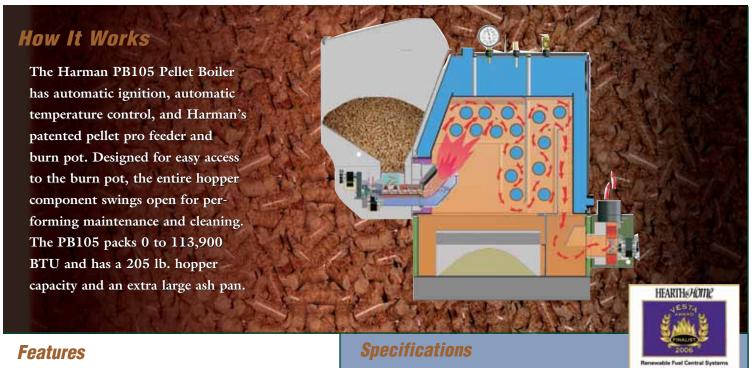

- 3 Pass Heat Exchanger Design maintains maximum
- Insulated Water Jacket
- Electronic Temperature Control
- Swing Open Access to burn pot/firebox
- 120 VAC
- 85% efficiency
- Front door with window for easy burn pot access and fire viewing



Hopper swings open for access to burn pot.

Included Accessories

- Water Temperature Sensor
- Outside Air Temperature Sensor
- Dual Boiler Water Temperature and Pressure Gauge
- Well for Water Sensor
- Pressure Relief Valve
- Boiler Water Drain Valve

Option

• Domestic Hot Water Coil




352 Mountain House Road Halifax, PA 17032 www.harmanstoves.com

BTU Range	0 to 113,900
Heating Capacity	2,500+ sq. ft.
Hopper Capacity	205 lbs
Fuel	Bio-Mass Wood Pellets
Flue Size	4" pellet vent pipe
Outside Air Size	2.75"
Fuse Rating	6 amp

Clearances

Front Side (fire door and ash pan door)	36"
Left Side (hopper end)	18"
Right Side (blower end)	20"
Back Side (opposite doors)	6" (16.5" recommended for access)

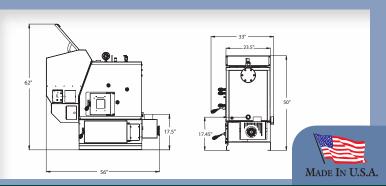

Tested by OMNI-Test Laboratories ASTM E1509 • ULC C1482-M1990

Your Harman Dealer Is: